



D TYPE

RIGHT ANGLE TYPE
N:NUMBER OF CONTACT/2

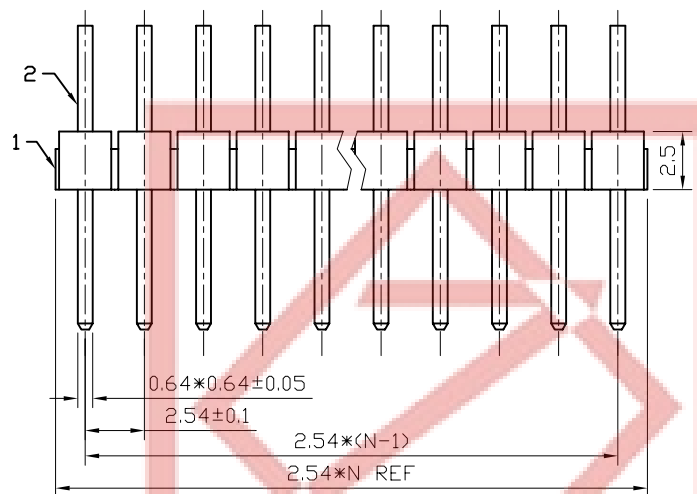

SMT TYPE
N:NUMBER OF CONTACT/2

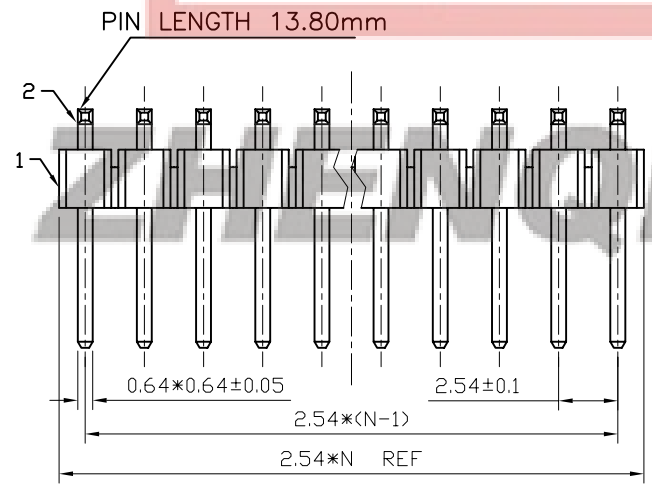


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 09/21/05'		
B	ADD DIM.	LJH 04/04/06'		LJC 04/04/06'

NOTES:

- MATERIAL
 - INSULATOR:THERMOPLASTIC(UL 94V-0).
 - CONTACT: COPPER ALLOY.
- SPECIFICATION
 - STORAGE TEMPERATURE: -20-70°C.
 - OPERATING TEMPERATURE: 0-85°C.
 - CONTACT RESISTANCE: 20mΩ max.
 - INSULATION RESISTANCE:1000MΩ min.
 - DIELECTRIC WITHSTANDING VOLTAGE: AC 500V PER MINUTE.
- PART NUMBER: DS1022
- PRODUCT NUMBER CODE:

TABLE A:

TYPE	Dimension			Pin Length (mm)
	A	B	C	
1	6.00	3.00	13.04	14.00 19.00
2	6.10	4.00	12.94	14.80 19.90
3	6.00	4.00	12.76	14.70 19.70

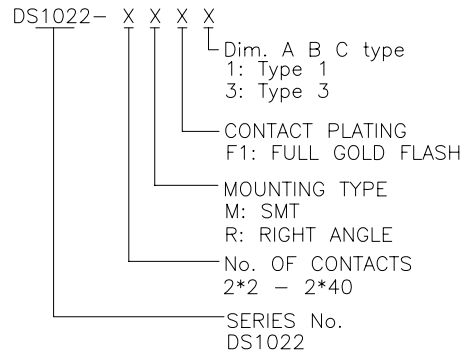

A/B/C:CUSTOMER LENGTH AVAILABLE

Tel: 86-574-63508787

Fax: 86-574-63510817

E-mail: sale@zhenqin.com.cn



GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE
X.	±0.60	X.	±5°	mm	PIN HEADER PITCH 2.54mm R/A&SMT TYPE
.X	±0.38	.X	±3°		
.XX	±0.25	.XX	±2°		
DRAWING TYPE		CUSTOMER		SHEET SIZE	SERIES
SCALE		1:1		A4	DS1022 SERIES
DRAWING NO.		C-DS1022-2*XXXX		SHEET 1 OF 1	



宁波正青电子有限公司
NINGBO ZHENQIN ELECTRONIC CO. LTD

D TYPE

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 04/06/06'		LJC 04/06/06'

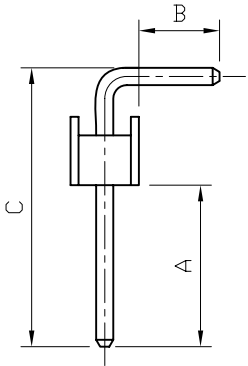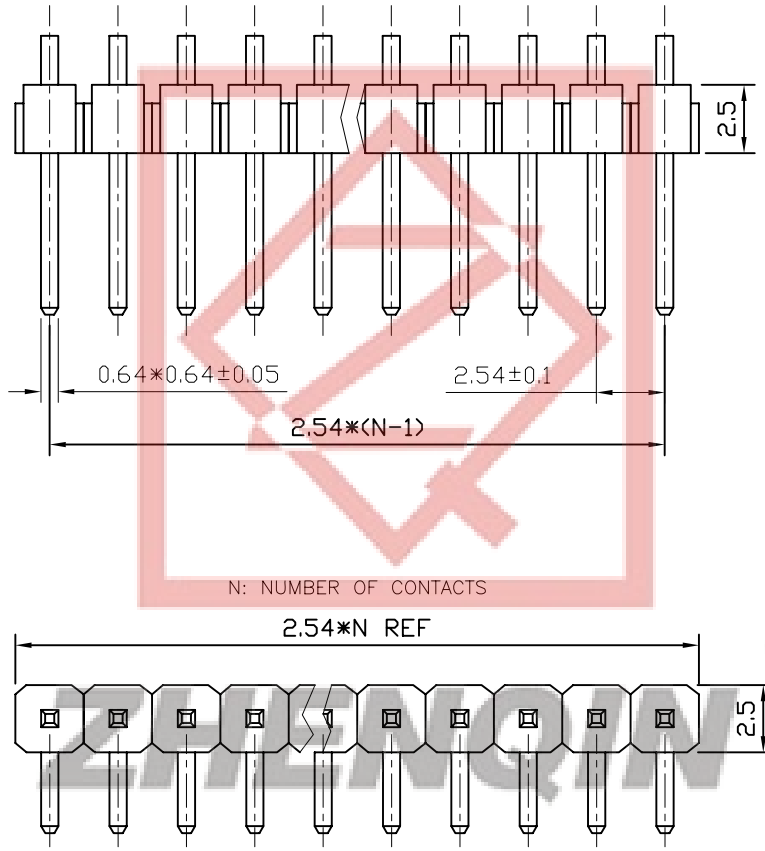



- NOTES:
- MATERIALS
 - 1.1 CONTACT MATERIAL: COPPER ALLOY.
 - 1.2 INSULATOR:PBT
 - SPECIFICATIONS
 - 2.1 CURRENT RATING: 3A.
 - 2.2 OPERATING TEMPERATURE: -40°C TO +105°C.
 - 2.3 INSULATION RESISTANCE: 1000MΩ MIN.
 - 2.4 CONTACT RESISTANCE: 20mΩ MAX.
 - 2.5 DIELECTRIC WITHSTANDING: 600 VAC.
 - PART NUMBER: DS1022
 - PRODUCT NUMBER CODE:

TABLE A:

TYPE	Dimension			Pin Length (mm)
	A	B	C	
1	6.00	3.00	10.36	13.80
2	6.00	4.50	9.50	14.40
3	6.10	4.00	10.40	14.80
4	6.00	3.20	10.50	14.10
5	6.00	3.50	10.82	14.70
6	4.70	1.73	8.20	10.40
7	15.00	3.00	19.08	22.50
8	6.20	3.10	11.10	15.00
9	1.00	1.91	5.00	7.40

DS1022- X X X D X

- Dim. A B C type
- 1: Type 1
- 5: Type 5
- BEND TYPE
- D:D TYPE
- CONTACT PLATING
- F1: FULL GOLD FLASH
- MOUNTING TYPE
- R:R/A
- No.OF CONTACTS
- 1*1 - 1*40
- SERIES No.
- DS1022

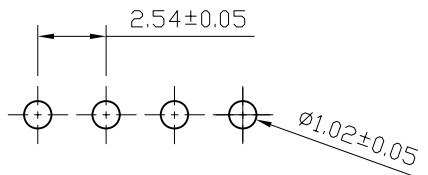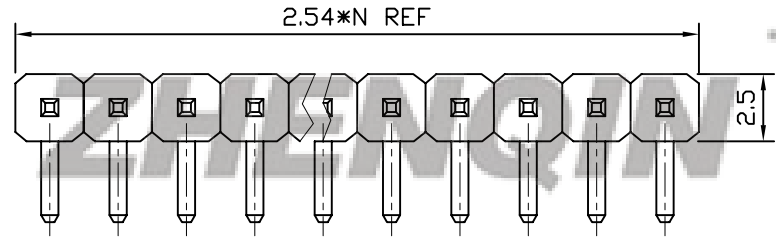


RECOMMEND P.C.BOARD LAYOUT

Tel: 86-574-63508787

Fax: 86-574-63510817



E-mail: sale@zhenqin.com.cn

A/B/C: CUSTOMER LENGTH AVAILABLE

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	TITLE	PIN HEADER PITCH 2.54mm R/A TYPE
X. ±0.60	X. ±5°	UNITS mm		
.X ±0.38	.X ±3°	SHEET SIZE A4	SERIES DS1022 SERIES	
.XX ±0.25	.XX ±2°			
DRAWING TYPE	CUSTOMER	 宁波正青电子有限公司 NINGBO ZHENQIN ELECTRONIC CO. LTD		
SCALE	1:1 SHEET 1 OF 1			
DRAWING NO.	C-DS1022-1*XXXDX			

U TYPE

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 09/15/05'		
B	ADD DIM.	LJH 04/04/06'		LJC 04/04/06'
C	ADD DIM.	LJH 04/15/06'		
D	ADD DIM.	LJH 04/19/06'		

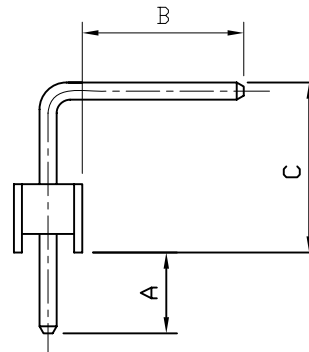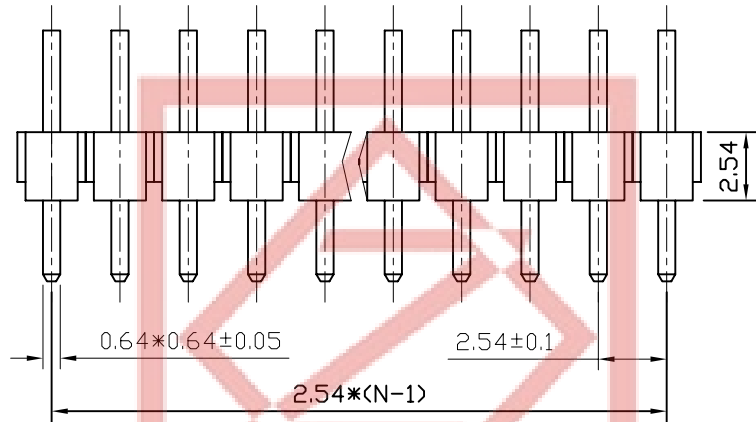

NOTES:



- MATERIALS
 - CONTACT MATERIAL: COPPER ALLOY.
 - INSULATOR: PBT
- SPECIFICATIONS
 - CURRENT RATING: 3A.
 - OPERATING TEMPERATURE: -40°C TO +105°C.
 - INSULATION RESISTANCE: 1000MΩ MIN.
 - CONTACT RESISTANCE: 20mΩ MAX.
 - DIELECTRIC WITHSTANDING: 600 VAC.
- PART NUMBER: DS1022
- PRODUCT NUMBER CODE:

N: NUMBER OF CONTACTS
2.54*N REF

TABLE A:

TYPE	Dimension			Pin Length (mm)
	A	B	C	
1	3.00	6.00	6.07	15.50
2	4.00	6.90	3.40	14.70
3	6.00	11.40	5.64	23.40
4	3.75	3.40	3.40	11.00
5	2.80	4.00	3.40	10.60
6	5.85	7.90	3.40	17.50
7	3.60	3.20	3.40	10.60
8	6.30	3.20	4.36	14.20
9	3.00	6.00	5.42	14.70
10	3.64	5.76	6.48	16.30
11	3.00	6.00	5.00	14.40
12	3.10	3.40	3.40	10.50
13	6.00	4.90	3.40	14.70
14	6.30	3.00	3.40	14.00
15	6.20	3.70	3.60	13.90

普通

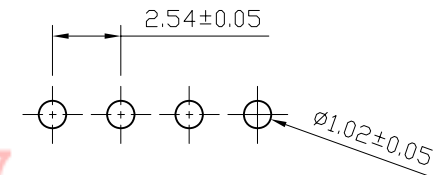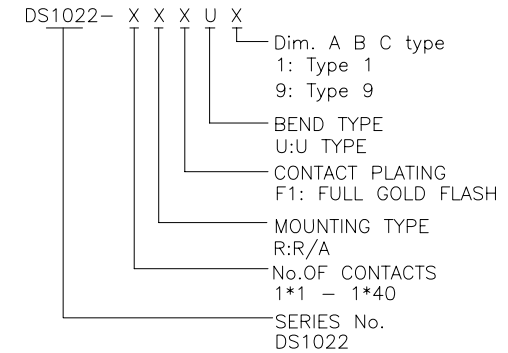

1574-63508787
 Fax: 86-574-63510817
 E-mail: sale@zhenqin.com.cn

RECOMMEND P.C.BOARD LAYOUT

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	TITLE	PIN HEADER PITCH 2.54mm R/A TYPE
X. ±0.60	X. ±5°	mm		
.X ±0.38	.X ±3°		SHEET SIZE	A4
.XX ±0.25	.XX ±2°		SERIES	DS1022 SERIES
DRAWING TYPE	CUSTOMER	宁波正青电子有限公司 NINGBO ZHENQIN ELECTRONIC CO. LTD		
SCALE	1:1			
DRAWING NO.	C-DS1022-1*XXXUX			