
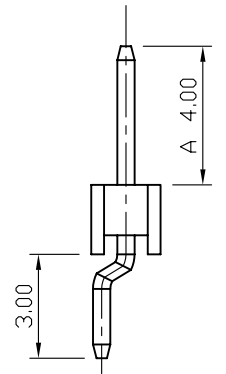
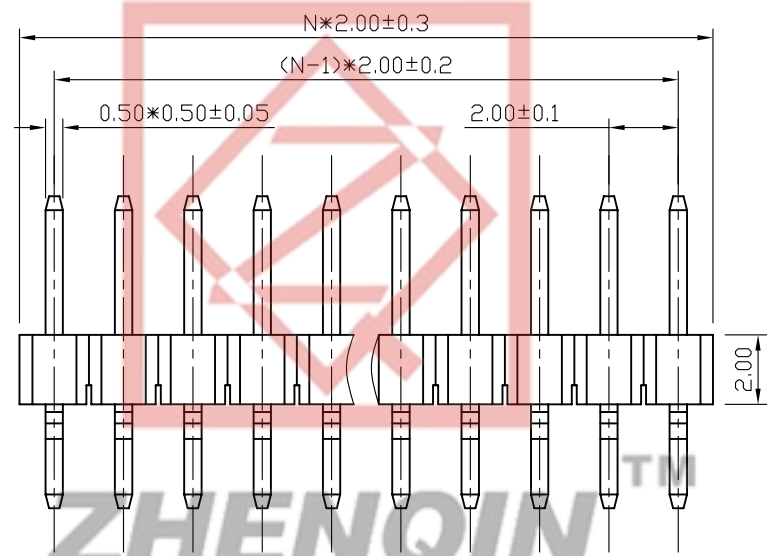


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 05/17/05'		



NOTES:

- MATERIAL&FINISHES
  - INSULATOR:THERMOPLASTIC(UL 94V-0).
  - CONTACT MATERIAL: COPPER ALLOY.
- SPECIFICATION
  - CURRENT RATING:1.5 Amp.
  - INSULATION RESISTANCE:1000MΩ Min.
  - DIELECTRIC WITHSTANDING:600VAC.
  - CONTACT RESISTANCE:20mΩ Max.
  - OPERATING TEMPERATURE:-20°C TO +80°C.
- PART NUMBER: DS1025-04
- PRODUCT NUMBER CODE:  
DS1025-04 - X X X X X

CONTACTS TYPE  
S:SMT TYPE  
HOUSING COLOR  
B:BLACK


CONTACT PLATING  
8:FULL GOLD FLASH

CONNECTOR TYPE  
P:PLUG S:SOCKET

No.OF CONTACTS  
1\*2-1\*X

SERIES No.  
DS1025-04

A: CUSTOMER LENGTH AVAILABLE  
N:NUMBER OF CONTACTS

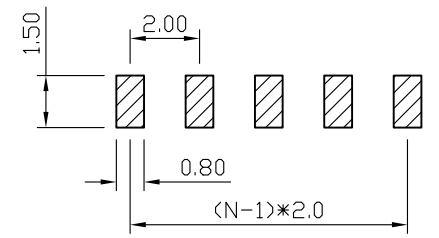

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

Tel: 86-574-63508787  
Fax: 86-574-63510817  
E-mail: sale@zhenqin.com.cn

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	SINGLE ROW RIGHT ANGLE S.M.T	
X.	±0.60	X.	±5°	UNITS	mm	SHEET	DS1025-04 SERIES	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES DS1025-04 SERIES		
.XX	±0.25	.XX	±2°	DRAWING TYPE CUSTOMER				
DRAWING TYPE		CUSTOMER		SCALE 1:1 SHEET 1 OF 1				
DRAWING NO.		C-DS1025-04-XXXXX		DRAWING NO. C-DS1025-04-XXXXX				



宁波正青电子有限公司  
NINGBO ZHENQIN ELECTRONIC CO. LTD