
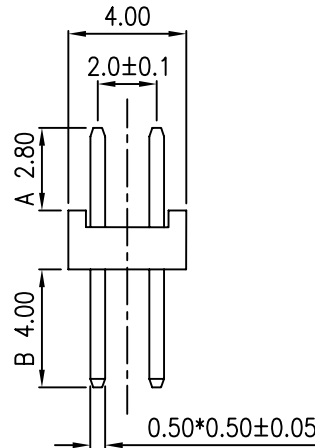
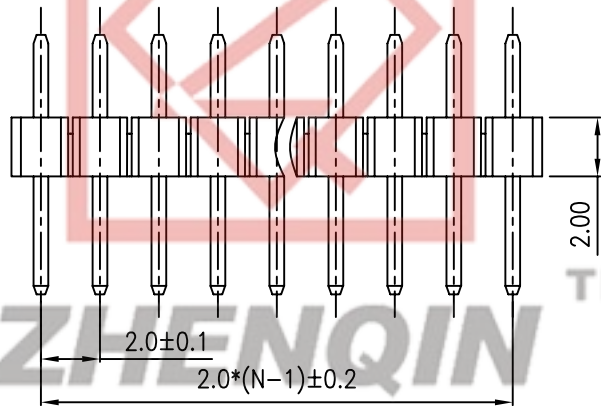


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 06/21/05'		

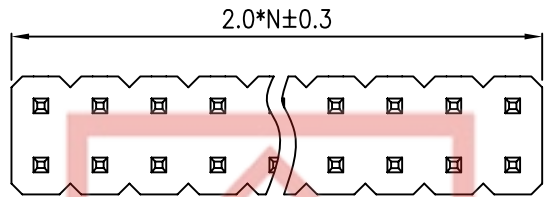

NOTES:

- MATERIAL&FINISHES
 - INSULATOR:THERMOPLASTIC(UL 94V-0).
 - CONTACT MATERIAL: COPPER ALLOY.
- SPECIFICATION
 - CURRENT RATING:1.5 Amp.
 - INSULATION RESISTANCE:1000MΩ Min.
 - DIELECTRIC WITHSTANDING:600VAC.
 - CONTACT RESISTANCE:20mΩ Max.
 - OPERATING TEMPERATURE:-20°C TO +80°C.
- PART NUMBER: DS1025-05
- PRODUCT NUMBER CODE:
DS1025-05 - X X X X X

CONTACTS TYPE
V:VERTICAL TYPE
HOUSING COLOR
B:BLACK


CONTACT PLATING
8: FULL GOLD FLASH

CONNECTOR TYPE
P:PLUG

No.OF CONTACTS
2*2-2*X

SERIES No.
DS1025-05

A&B:CUSTOMER LENGTH AVAILABLE
N: HALF OF CONTACTS

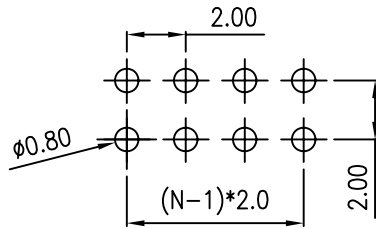

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

Tel: 86-574-63508787
Fax: 86-574-63510817
E-mail: sale@zhenqin.com.cn

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	DUAL ROW STRAIGHT
X.	±0.60	X.	±5°	UNITS	mm	SHEET	1 OF 1
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1025-05 SERIES
.XX	±0.25	.XX	±2°	宁波正青电子有限公司 NINGBO ZHENQIN ELECTRONIC CO. LTD			
2	CONTACT	COPPER ALLOY	GOLD PLATED	DRAWING TYPE	CUSTOMER		
1	HOUSING	THERMOPLASTIC	UL 94 V-0	SCALE	1:1		
ITEM	PART NAME	PART NO.	MATERILAS	FINISHED	DRAWING NO.	C-DS1025-05-XXXXX	

A
B
C
D
E
F
G
H

A
B
C
D
E
F
G
H

