



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 05/08/05'		

NOTES:


- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 20mΩ Max. INITIAL.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ Min.
- ENVIRONMENT CHARACTERISTICS:
 - OPERATING TEMPERATURE: 0°C~+85°C.
 - STORAGE TEMPERATURE: -20°C~+70°C.
- PART NUMBER: DS1026-03
- PRODUCT NUMBER CODE:

DS1026-03 - X X X X X X

- CONTACT TYPE
- 1: B1 TYPE
- 2: B2 TYPE
- CONTACTS TYPE
- S:SMT
- HOUSING COLOR
- B:BLACK
- CONTACT PLATING
- 8: FULL GOLD FLASH
- CONNECTOR TYPE
- S:SOCKET
- No.OF CONTACTS
- 1*1-1*X
- SERIES No.
- DS1026-03

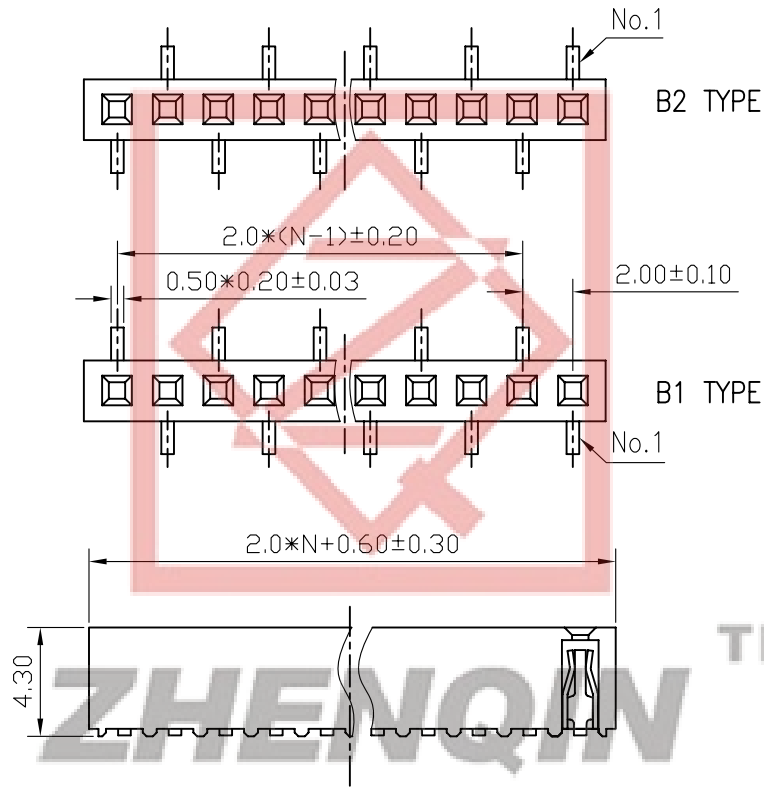

N:NUMBER OF CONTACTS

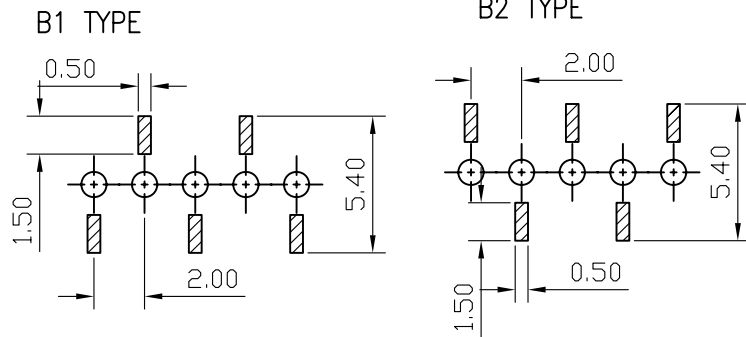

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

Tel: 86-574-63508787

Fax: 86-574-63510817

E-mail: sale@zhenqin.com.cn

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	SINGLE ROW S.M.T
X.	±0.60	X.	±5°	UNITS	mm	SHEET SIZE	
.X	±0.38	.X	±3°	SHEET SIZE		A4	SERIES
.XX	±0.25	.XX	±2°	SHEET SIZE		A4	DS1026-03 SERIES
DRAWING TYPE		CUSTOMER				宁波正青电子有限公司 NINGBO ZHENQIN ELECTRONIC CO. LTD	
SCALE		1:1					
ITEM	PART NAME	PART NO.	MATERIALS	FINISHED	DRAWING NO.	C-DS1026-03-XXXXXX	

2	CONTACT		COPPER ALLOY	GOLD PLATED	DRAWING TYPE	CUSTOMER	
1	HOUSING		THERMOPLASTIC	UL 94 V-0	SCALE	1:1	SHEET 1 OF 1
ITEM	PART NAME	PART NO.	MATERIALS	FINISHED	DRAWING NO.	C-DS1026-03-XXXXXX	



宁波正青电子有限公司
NINGBO ZHENQIN ELECTRONIC CO. LTD