

N: NUMBER OF CONTACTS/2
 B: CUSTOMER LENGTH AVAILABLE

| REV. | DESCRIPTION | DRAWN | CHECKED | APPROVED |
|------|-------------|---------------|---------|----------|
| A | NEW RELEASE | LJH 06/22/05' | | |
| | | | | |
| | | | | |

NOTES:



- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 20mΩ Max. INITIAL.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ Min.
- ENVIRONMENT CHARACTERISTICS:
 - OPERATING TEMPERATURE: 0°C~+85°C.
 - STORAGE TEMPERATURE: -20°C~+70°C.

3. PART NUMBER: DS1026-12

4. PRODUCT NUMBER CODE:

DS1026-12 - X X X X X

- CONTACTS TYPE
R:RIGHT ANGLE
- HOUSING COLOR
B:BLACK
- CONTACT PLATING
8: FULL GOLD FLASH
- CONNECTOR TYPE
S:SOCKET
- No.OF CONTACTS
2*1-2*X
- SERIES No.
DS1026-12

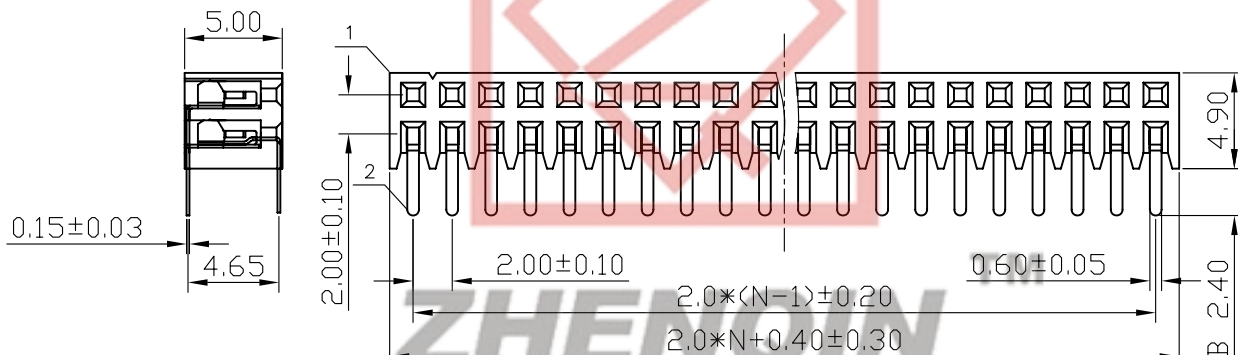

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

Tel: 86-574-63508787
 Fax: 86-574-63510817
 E-mail: sale@zhenqin.com.cn

| | | | | | | | | |
|-------------------|-------|-------------------|-----|---|----|---|------------------------|--|
| GENERAL TOLERANCE | | ANGLE TOLERANCE | | PROJECTION | | TITLE | SIDE ENTRY RIGHT ANGLE | |
| X. | ±0.60 | X. | ±5' | UNITS | mm | Http://www.zhenqin.com.cn | | |
| .X | ±0.38 | .X | ±3' | SHEET SIZE | A4 | SERIES | DS1026-12 SERIES | |
| .XX | ±0.25 | .XX | ±2' | Add: West Yuhua Town, Cixi, Ningbo, China | | | | |
| DRAWING TYPE | | CUSTOMER | | | | 宁波正青电子有限公司 | | |
| SCALE | | 1:1 | | SHEET | | NINGBO ZHENQIN ELECTRONIC CO. LTD | | |
| DRAWING NO. | | C-DS1026-12-XXXXX | | ZHEN QIN | | | | |

| | | | | | | | | |
|------|-----------|----------|---------------|-------------|--------------|-------------------|-------|--------|
| 2 | CONTACT | | COPPER ALLOY | GOLD PLATED | DRAWING TYPE | CUSTOMER | | |
| 1 | HOUSING | | THERMOPLASTIC | UL 94 V-0 | SCALE | 1:1 | SHEET | 1 OF 1 |
| ITEM | PART NAME | PART NO. | MATERILAS | FINISHED | DRAWING NO. | C-DS1026-12-XXXXX | | |