



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 04/27/05'		

NOTES:


- MATERIAL
 - INSULATOR:THERMOPLASTIC(UL 94V-0).
 - CONTACT MATERIAL:COPPER ALLOY.
- SPECIFICATION
 - CURRENT RATING:1.5 Amp.
 - INSULATION RESISTANCE:1000MΩ Min.
 - DIELECTRIC WITHSTANDING:600VAC.
 - CONTACT RESISTANCE:50mΩ Max.
 - OPERATING TEMPERATURE:-40°C TO+105°C.
- PART NUMBER: DS1030-03
- PRODUCT NUMBER CODE:

DS1030-03 - X X X X X
 DIM.A B TYPE
 1: TYPE 1
 MOUNTING TYPE
 S: SMT TYPE
 HOUSING COLOR
 B:BLACK
 CONNECTOR PLATING
 8: FULL GOLD FLASH
 CONECT TYPE
 P:PLUG
 No.OF CONTACTS
 2*1-2*40
 SERIES No.
 DS1030-03

TYPE	DIM A	DIM B
1	6.00	6.00

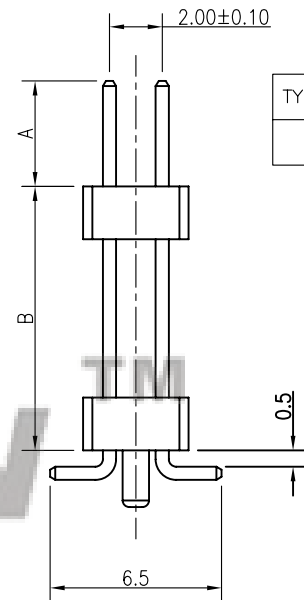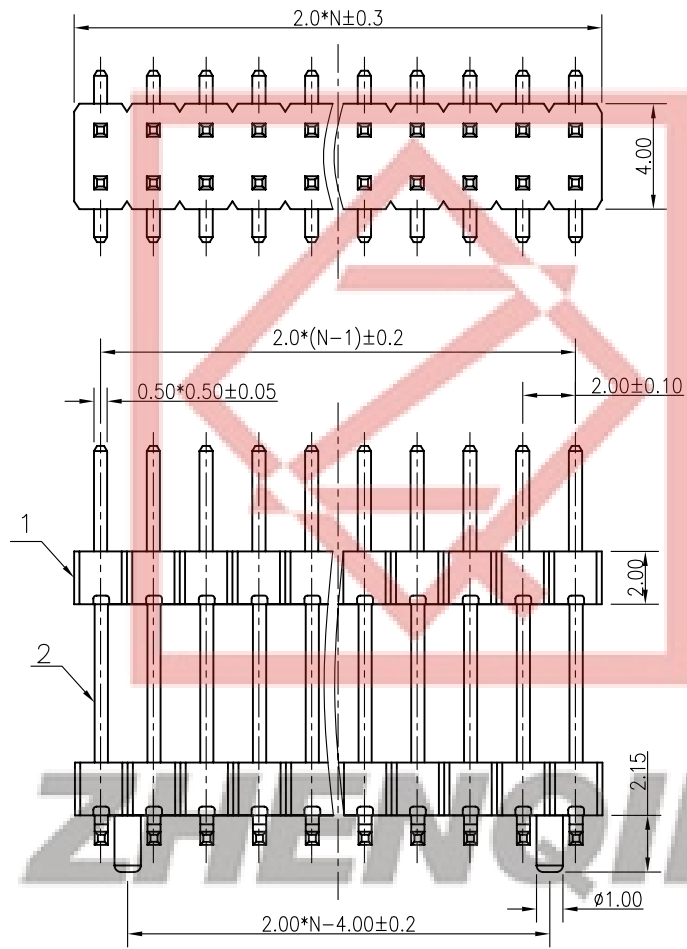

N:NUMBER OF CONTACTS/2

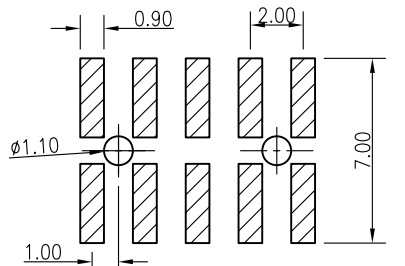

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

Tel: 86-574-63508787
 Fax: 86-574-63510817
 E-mail: sale@zhenqin.com.cn

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	2.0mm PITCH PIN HEADER
X.	±0.60	X.	±5°	UNITS	mm		DUAL ROW W/N LOCATE PEG S.M.T
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1030-03 SERIES
.XX	±0.25	.XX	±2°	Add: West Hooli Town Civi Ningbo China			
2	CONTACT	COPPER ALLOY	GOLD FLASH	DRAWING TYPE	CUSTOMER		
1	HOUSING	THERMOPLASTIC	UL 94 V-0	SCALE	1:1	SHEET	1 OF 1
ITEM	PART NAME	PART NO.	MATERILAS	FINISHED	DRAWING NO.	C-DS1030-03-XXXXXX	

宁波正青电子有限公司
 NINGBO ZHENQIN ELECTRONIC CO. LTD