


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 06/22/05'		

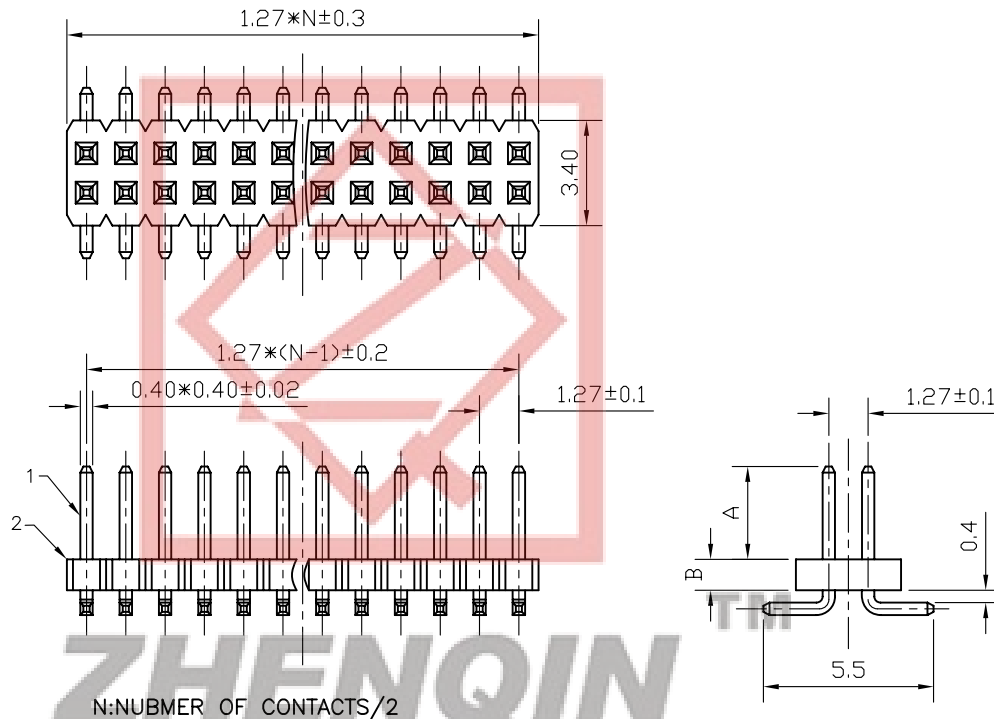

N:NUMBER OF CONTACTS/2

TYPE	DIM A
1	3.00

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

NOTES:

- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 50mΩ Max. INITIAL.
 - DIELECTRIC WITHSTANDING VOLTAGE: 300V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ Min.
- ENVIRONMENT CHARACTERISTICS:
 - OPERATING TEMPERATURE: 0°C~+85°C.
 - STORAGE TEMPERATURE: -20°C~+70°C.
- PART NUMBER: DS1031-08
- PRODUCT NUMBER CODE:

DS1031-08 - X X X X X X X X

- DIM.A TYPE
1: TYPE 1
- HOUSING HEIGHT(DIM.B)
1: 1.0mm
2: 1.50mm
3: 2.00mm
- MOUNTING TYPE
S: SMT TYPE
- HOUSING COLOR
B:BLACK
- CONTACT PLATING
8: FULL GOLD FLASH
- CONNECTOR TYPE
P:PLUG
- No.OF CONTACTS
2*1-2*40
- SERIES No.
DS1031-08

Tel: 86-574-63508787

Fax: 86-574-63510817

E-mail: sale@zhenqin.com.cn

Http://www.zhenqin.com.cn
 Add: West Binlin Town Cixi Ningbo China

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	PIN HEADER PITCH 1.27mm SMT TYPE	
X	±0.60	X	±5'	UNITS	mm			
.X	±0.38	.X	±3'	SHEET SIZE	A4	SERIES	DS1031-08 SERIES	
.XX	±0.25	.XX	±2'					
DRAWING TYPE		CUSTOMER				NINGBO ZHENQIN ELECTRONIC CO. LTD		
SCALE		1:1		SHEET		1 OF 1		
DRAWING NO.		C-DS1031-08-XXXXXX		ZHEN QIN				

2	CONTACT		COPPER ALLOY	GOLD FLASH
1	HOUSING		THERMOPLASTIC	UL 94 V-0
ITEM	PART NAME	PART NO.	MATERIALS	FINISHED