

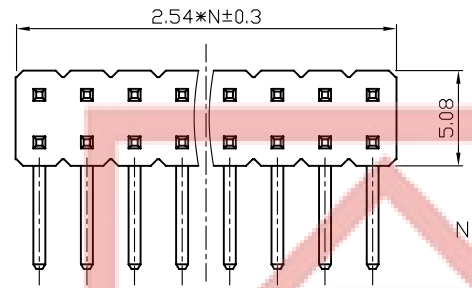


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 05/06/05'		

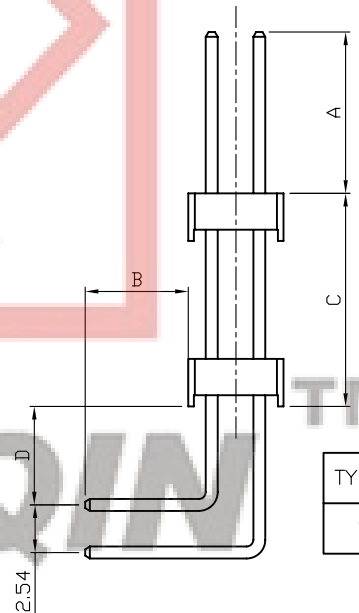



N: NUMBER OF CONTACTS/2

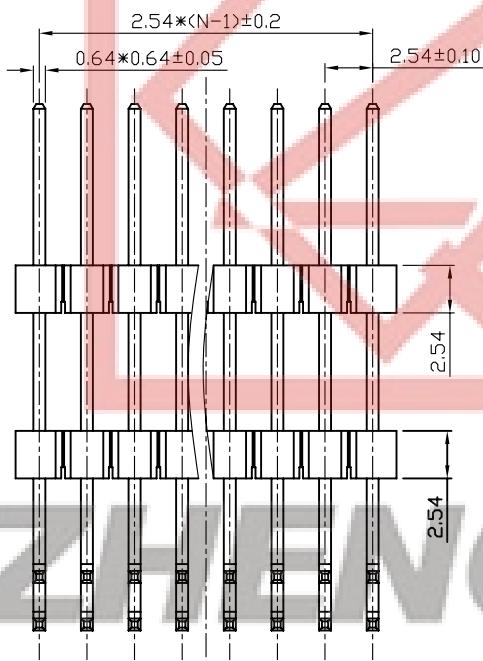

TYPE	DIM A	DIM B	DIM C	DIM D
1	8.60	5.50	11.37	5.25

NOTES:

- MATERIAL
 - INSULATOR:PBT(UL 94V-0).
 - CONTACT MATERIAL:COPPER ALLOY.
- SPECIFICATION
 - CURRENT RATING:1.5 Amp.
 - INSULATION RESISTANCE:1000MΩ Min.
 - DIELECTRIC WITHSTANDING:600VAC.
 - CONTACT RESISTANCE:50mΩ Max.
 - OPERATING TEMPERATURE:-40°C TO+105°C.
- PART NUMBER: DS1029-05
- PRODUCT NUMBER CODE:

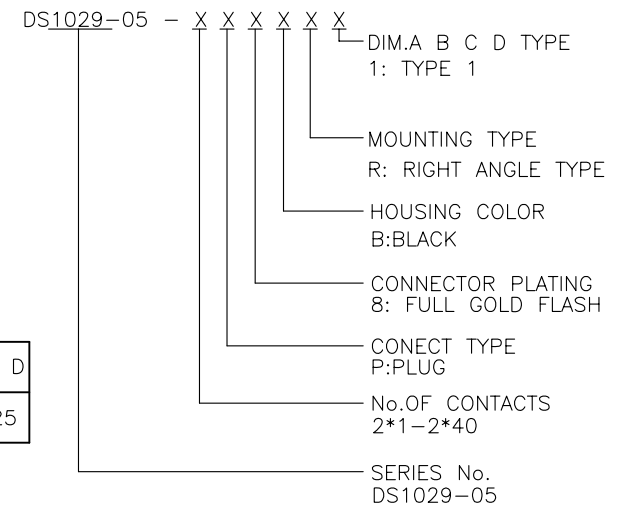

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

Tel: 86-574-63508787
 Fax: 86-574-63510817
 E-mail: sale@zhenqin.com.cn

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE	2.54mm PITCH PIN HEADER	
X.	±0.60	X.	±5'	UNITS		mm	DUAL ROW RIGHT ANGLE
.X	±0.38	.X	±3'	SHEET SIZE	A4	SERIES	DS1029-05 SERIES
.XX	±0.25	.XX	±2'	SHEET NO. 1 OF 1			
DRAWING TYPE		CUSTOMER		ZHEN QIN			
SCALE		1:1		NINGBO ZHENQIN ELECTRONIC CO. LTD			
DRAWING NO.		C-DS1029-05-XXXXXX		NINGBO ZHENQIN ELECTRONIC CO. LTD			

2	CONTACT		COPPER ALLOY	GOLD FLASH	DRAWING TYPE	CUSTOMER
1	HOUSING		THERMOPLASTIC	UL 94 V-0	SCALE	1:1
ITEM	PART NAME	PART NO.	MATERILAS	FINISHED	DRAWING NO.	C-DS1029-05-XXXXXX

宁波正青电子有限公司
 NINGBO ZHENQIN ELECTRONIC CO. LTD