

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 06/22/05'		


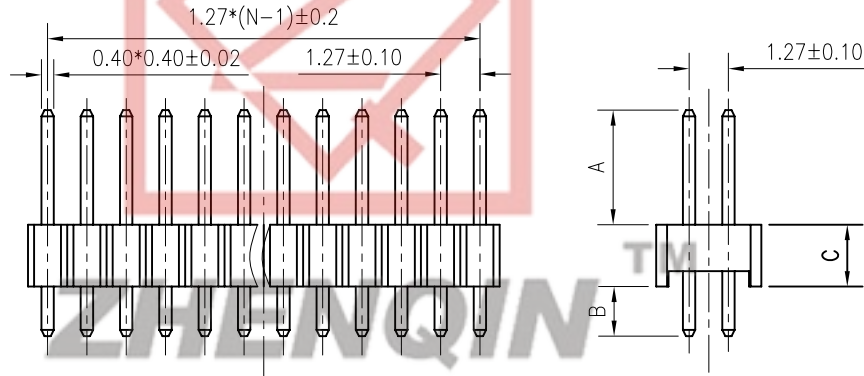
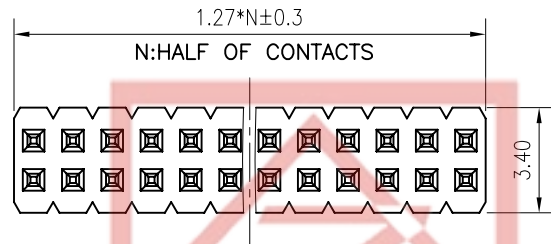


TABLE A:

TYPE	Dimension	
	A	B
1	3.70	2.10
2	3.50	3.50

NOTES:

- MATERIAL
 - INSULATOR:PBT(UL 94V-0).
 - CONTACT MATERIAL:COPPER ALLOY.
- SPECIFICATION
 - CURRENT RATING:1.0 Amp.
 - INSULATION RESISTANCE:500MΩ Min.
 - DIELECTRIC WITHSTANDING:300VAC.
 - CONTACT RESISTANCE:50mΩ Max.
 - OPERATING TEMPERATURE:-40°C TO+105°C.
- PART NUMBER: DS1031-06
- PRODUCT NUMBER CODE:

DS1031-06 - X X X X X X X X

- DIM.A B TYPE
- 1: TYPE 1
- 2: TYPE 2
- HOUSING HEIGHT(DIM.C)
- 1: 1.0mm
- 2: 1.50mm
- 3: 2.00mm
- MOUNTING TYPE
- V:VERTICAL TYPE
- HOUSING COLOR
- B:BLACK
- CONTACT PLATING
- 8: FULL GOLD FLASH
- CONNECTOR TYPE
- P:PLUG
- No.OF CONTACTS
- 2*1-2*40
- SERIES No.
- DS1031-06

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	1.27mm PITCH PIN HEADER DUAL ROW STRAIGHT
X	±0.60	X	±5'	UNITS	mm	SHEET	DS1031-06 SERIES
.X	±0.38	.X	±3'	SHEET SIZE	A4	SERIES DS1031-06 SERIES	
.XX	±0.25	.XX	±2'	SHEET 1 OF 1			
DRAWING TYPE		CUSTOMER		ZHEN QIN			
SCALE		1:1		NINGBO ZHENQIN ELECTRONIC CO. LTD			
DRAWING NO.		C-DS1031-06-XXXXXXX		NINGBO ZHENQIN ELECTRONIC CO. LTD			

2	CONTACT		COPPER ALLOY	GOLD FLASH
1	HOUSING		THERMOPLASTIC	UL 94 V-0
ITEM	PART NAME	PART NO.	MATERILAS	FINISHED

Tel: 86-574-63508787
 Fax: 86-574-63510817
 E-mail: sale@zhenqin.com.cn

宁波正青电子有限公司
 NINGBO ZHENQIN ELECTRONIC CO. LTD